

E1 - ELECTRONIC SEQUENTIAL TIMER





T4 - T8 - T12 SERIES

The sequential timer is an electronic device designed to drive the cleaning cycles on dust collector filters. The sequential timer is controlled by a microprocessor, which ensures high reliability and flexibility providing for all the options, which meet most of the market requests.



| TECHNICAL DATA | |
|-------------------|--------------------------------------|
| Power supply | 110V - 230V / 50-60 Hz |
| Power consumption | 5 VA stand by - 30 VA operating |
| Output voltages | 110V - 230V - 24V / 50-60 Hz - 24VDC |
| Temperature range | -10 ± +50° C |
| Visual indicators | LED red D 3mm |
| Setting | Dip switch SW1, SW2, SW3, SW4 |
| Protection degree | IP65 |
| dP control | remote dP monitor |
| Terminals | 2,5 mmq 250 VAC |
| Weight | Kg 0,6 |

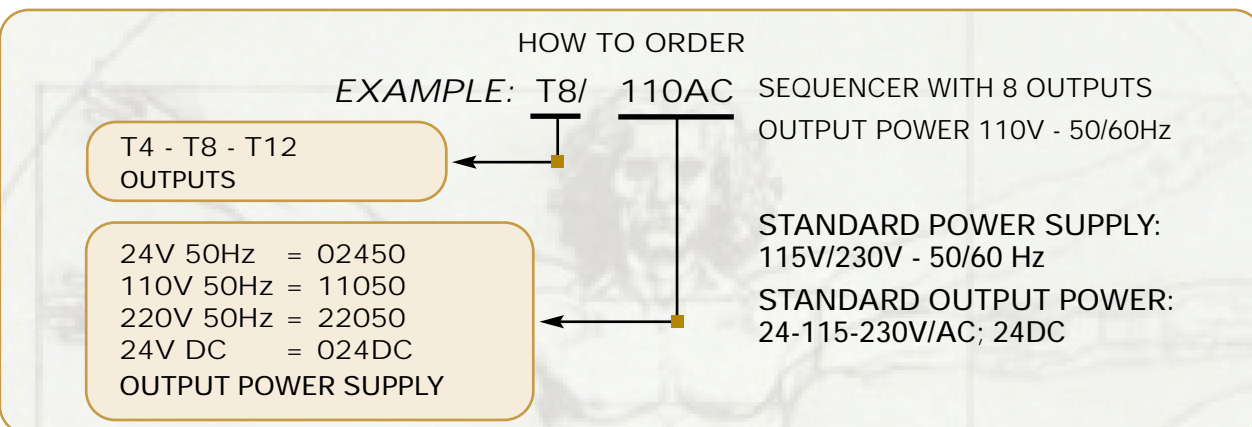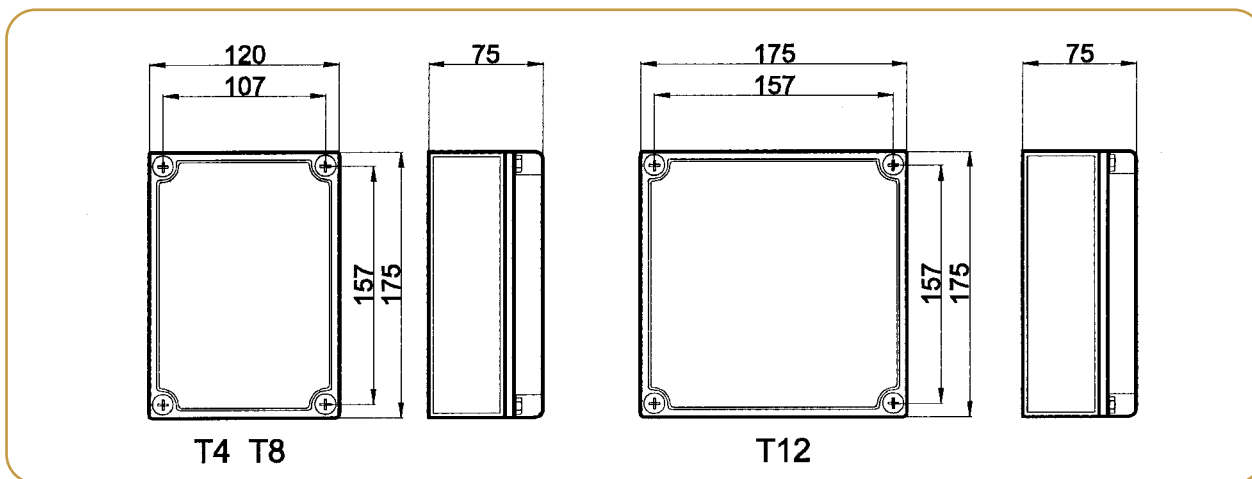

DESCRIPTION OF OPERATION**- SETTING**

DIP switches allow for accurate, flexible and reliable settings of the various functions of a cleaning cycle in a reverse jet pulse dust collector.

- SW1** After cleaning cycle
- SW2** Pulse time adjustment
- SW3** Pause time adjustment
- SW4** Number of outputs adjustment.

- CLEANING CYCLE

The timer automatically starts when the main electrical supply is ON and all the preset cycle conditions are confirmed.


- AFTER CLEANING CYCLE

This feature allows the timer to continue to operate for a programmed number of cycles after the dust collector fan is turned off.

- REMOTE Delta-P CONTROL

This option allows the sequential timer to operate only when a preset pressure switch contact is closed.

The remote Delta-P control is connected to the terminal C6 of the sequential timer.

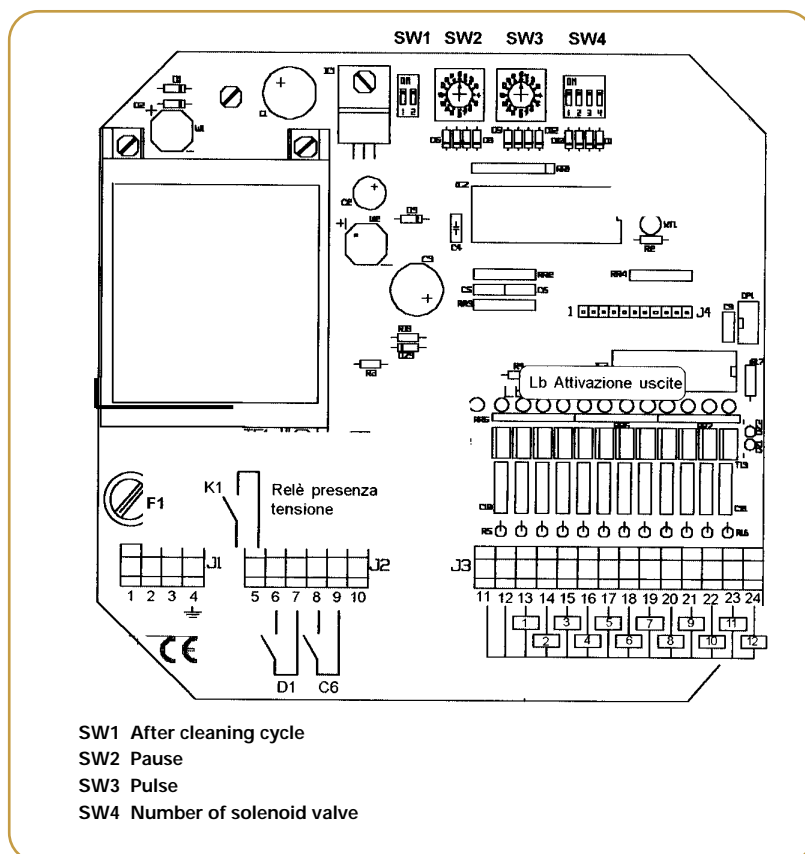

E1 - ELECTRONIC SEQUENTIAL TIMER




T16 - T20 - T24 SERIES

The sequential timer is an electronic device designed to drive the cleaning cycles on dust collector filters. The sequential timer is controlled by a microprocessor, which ensures high reliability and flexibility providing for all the options, which meet most of the market requests..



| TECHNICAL DATA | |
|-------------------|-------------------------------------|
| Power supply | 110V - 230V / 50-60 Hz |
| Power consumption | 5 VA stand by - 30 VA operating |
| Output voltages | 110V - 230V - 24V / 50-60Hz - 24VDC |
| Temperature range | -10 ± +50° C |
| Visual indicators | LED red D 3mm |
| Setting | Dip switch SW1, SW2, SW3, SW4 |
| Protection degree | IP65 |
| dP control | remote dP monitor |
| Terminals | 2,5 mmq 250 VAC |
| Weight | Kg 0,6 |

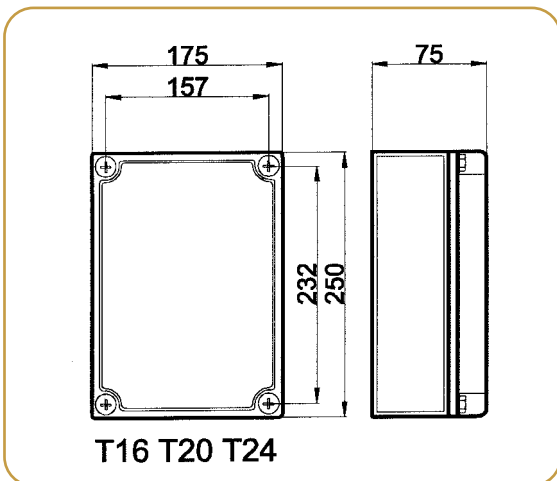

HOW TO ORDER

EXAMPLE: T20/ 110AC SEQUENCER WITH 20 OUTPUTS
OUTPUT POWER 110V - 50/60Hz

T16 - T20 - T24
OUTPUTS

24V 50Hz = 02450
110V 50Hz = 11050
220V 50Hz = 22050
24V DC = 024DC
OUTPUT POWER SUPPLY

STANDARD POWER SUPPLY:
115V/230V - 50/60 Hz
STANDARD OUTPUT POWER:
24-115-230V/AC; 24DC

ELECTRONIC SEQUENTIAL TIMER

T16 - T20 - T24 SERIES

DESCRIPTION OF OPERATION

- SETTING

DIP switches allow for accurate, flexible and reliable settings of the various functions of a cleaning cycle in a reverse jet pulse dust collector.

SW1 After cleaning cycle

SW2 Pulse time adjustment

SW3 Pause time adjustment

SW4 Number of outputs adjustment.

- CLEANING CYCLE

The timer automatically starts when the main electrical supply is ON and all the preset cycle conditions are confirmed.

- AFTER CLEANING CYCLE

This feature allows the timer to continue to operate for a programmed number of cycles after the dust collector fan is turned off.

- REMOTE Delta-P CONTROL

This option allows the sequential timer to operate only when a preset pressure switch contact is closed.

The remote Delta-P control is connected to the terminal C6 of the sequential timer.

